

Model: **DI031-601V+**

**Roof Mount Centrifugal Fan**

**Vertical Discharge**

*General Information:*

Common Applications:

General ventilation, commercial kitchen

Suitable for roof installation up to 15° from horizontal

Galvanised steel base

Powder coated steel cowl, in Color-bond "Dune"

High efficiency backward curved impeller directly driven by IP44 external rotor motor

Easy access to the impeller for wiring, cleaning and maintenance

Removable lifting lugs for ease of installation



*Model Specification:*

Power / Current	<b>0.07 kW / 0.34 A</b>
Speed	<b>920 rpm</b>
Power Supply	240V single phase 50 Hz
dBA@3m	<b>37</b>
Mass / Weight	20 kg

+ Refer to wiring diagram WD1-01 available on [www.aerovent.com.au/downloads](http://www.aerovent.com.au/downloads)

\* Steel construction meets AS1668 for Kitchen Hood Exhaust

\* Performance standard ISO 5801

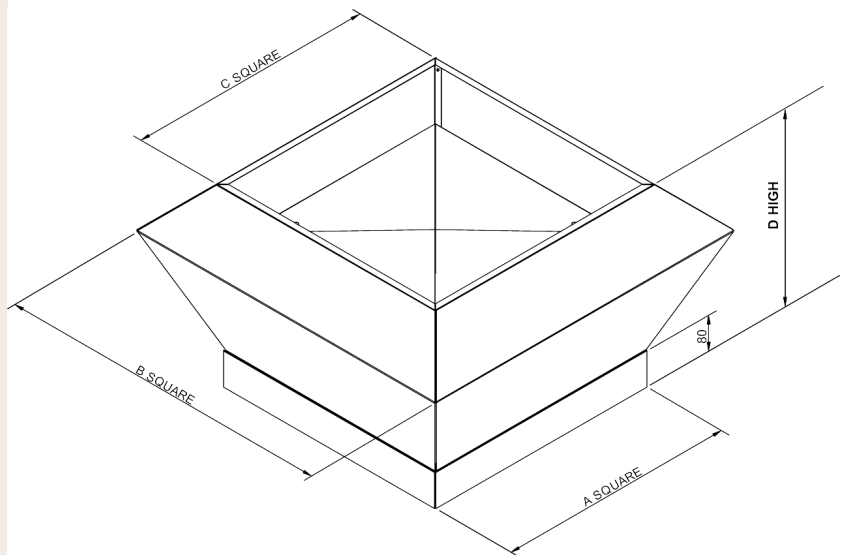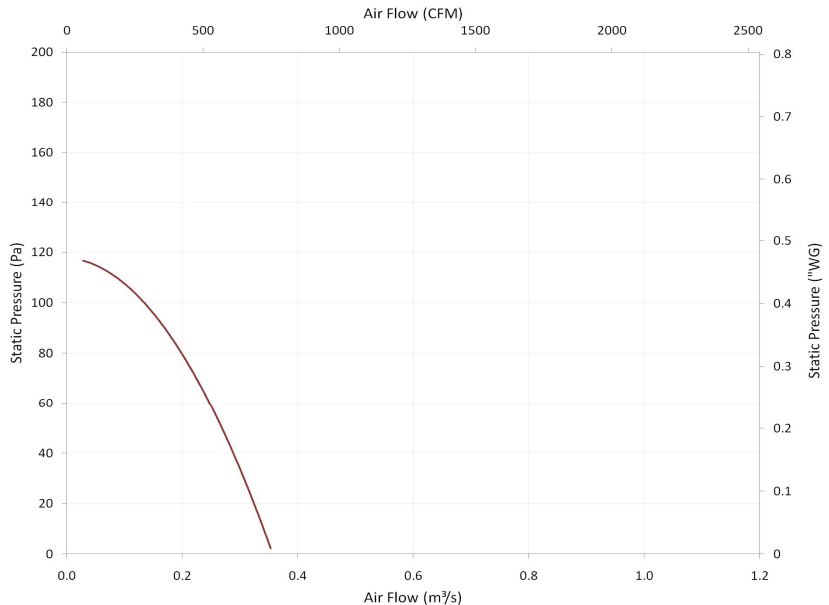

				Recommended upstand dimensions (supplied by others)		
A	B	C	D	Max. outside	Min. inside	Min. height
540	757	555	446	530	430	90

*Series* **DIAMOND**

[www.aerovent.com.au](http://www.aerovent.com.au)



Due to Aerovent Australia's constant product improvement and development program, product details may change without prior notice.