

Model: **DIO40-403H⁺**
DIO40-063H⁺
DIO40-463H⁺⁺

Roof Mount Centrifugal Fan

Horizontal Discharge

General Information:

Applications: General Ventilation

Suitable for roof installation up to 15° from horizontal

Galvanised steel base

UV stabilised fibreglass cowl
- colour Colorbond "Dune"

High efficiency backward curved impeller directly driven by IP54 external rotor motor

Removable lifting lugs for ease of installation



Model Specification:

Model	403 / 063
Power / Current	0.45 / 0.32 kW 0.85 / 0.51 A
Speed	1335 / 1050 rpm
Power Supply	415V Three phase 50 Hz
dBA@3m	52 / 46
Mass / Weight	29 kg

+ Refer to wiring diagram WD3-01 for different speed settings, available on www.aerovent.com.au/downloads

++ dual-speed fan operates with a dual-speed switch (available as optional accessory)

* Performance standard ISO 5801

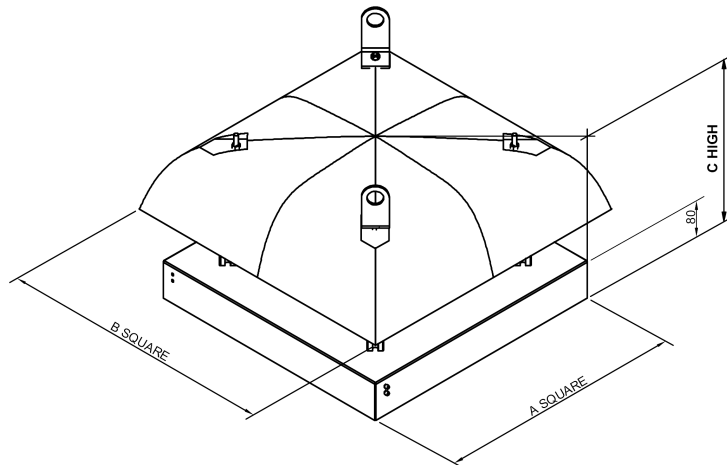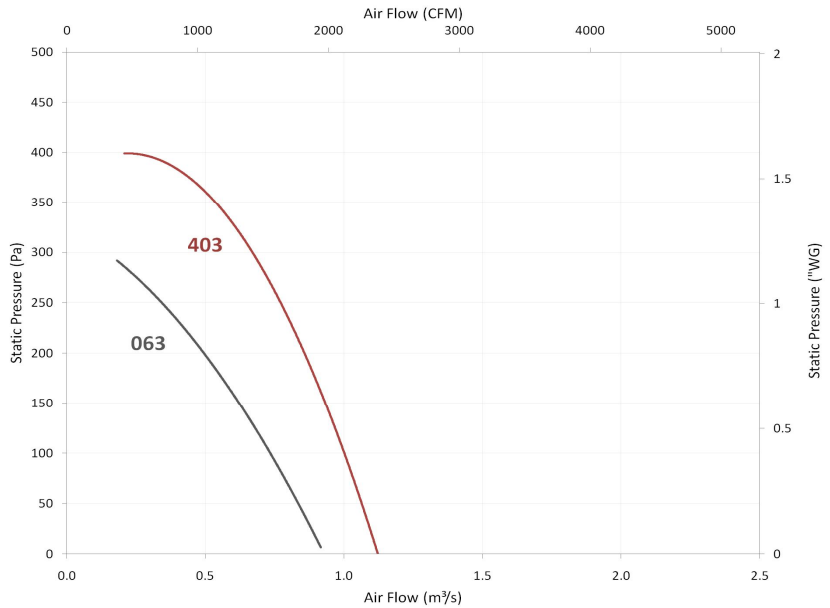

			Recommended upstand dimensions (supplied by others)		
A	B	C	Max. outside	Min. inside	Min. height
655	710	689	645	535	90

Series **DIAMOND**

www.aerovent.com.au



Due to Aerovent Australia's constant product improvement and development program, product details may change without prior notice.