

Model: **DI063-403V⁺**
DI063-063V⁺
DI063-463V⁺⁺

Roof Mount Centrifugal Fan

Vertical Discharge

General Information:

Applications: General ventilation, commercial kitchen

Suitable for roof installation up to 15° from horizontal

Galvanised steel base

Powder coated steel cowl, in Colorbond "Dune"

High efficiency backward curved impeller directly driven by IP54 external rotor motor

Easy access to the impeller for wiring, cleaning and maintenance

Removable lifting lugs for ease of installation

Model Specification:



Model	403 / 063
Power / Current	3.8 / 2.7 kW 6.2 / 4.4 A
Speed	1375 / 1120 rpm
Power Supply	415V Three phase 50 Hz
dBA@3m	67 / 62
Mass / Weight	119 kg

+ Refer to wiring diagram WD3-01 for different speed settings, available on www.aerovent.com.au/downloads

++ dual-speed fan operates with a dual-speed switch (available as optional accessory)

* Steel construction meets AS1668 for Kitchen Hood Exhaust

* Performance standard ISO 5801

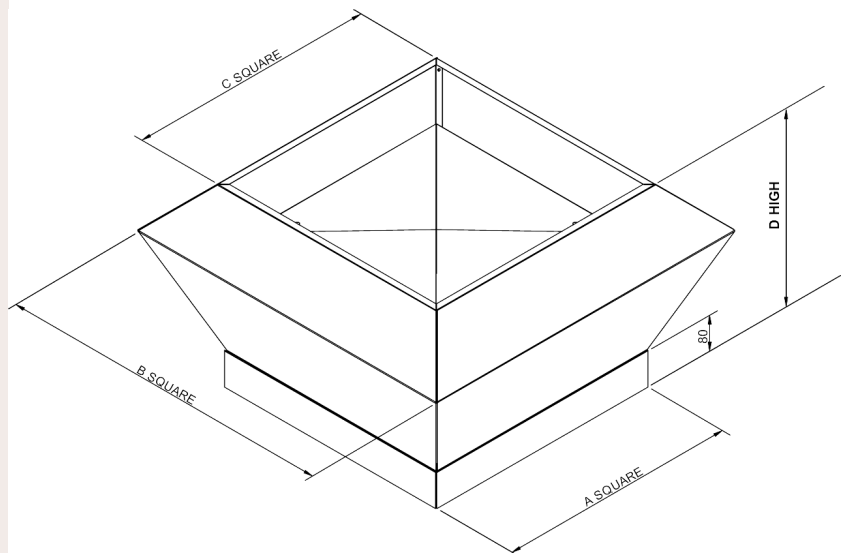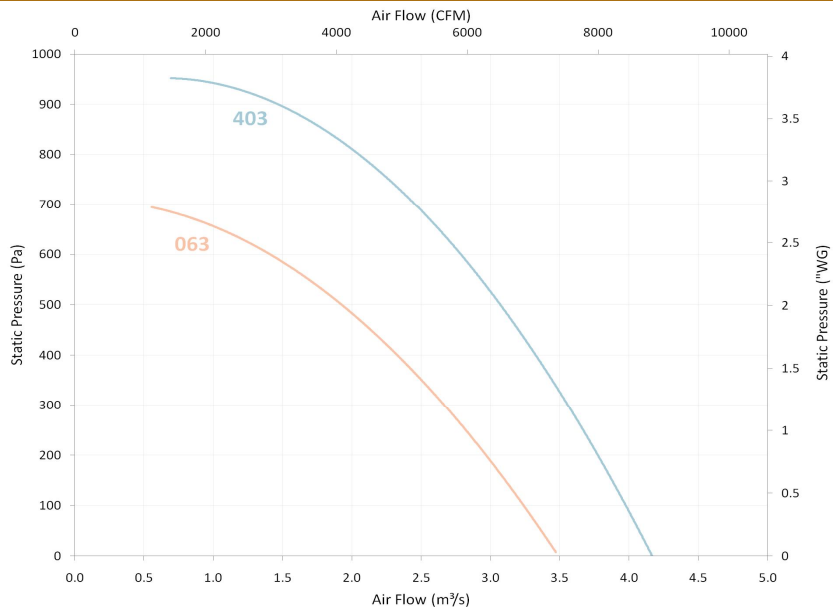

				Recommended upstand dimensions (supplied by others)		
A	B	C	D	Max. outside	Min. inside	Min. height
950	1462	995	833	940	840	90

Series **DIAMOND**

www.aerovent.com.au



Due to Aerovent Australia's constant product improvement and development program, product details may change without prior notice.